


PAVERS

CITYSCAPE BISHOP'S HAT

The Bishop's Hat consists of two geometric concrete pave stones that offer a vast array of design possibilities. The two shapes modulate together to form a beautiful kaleidoscope of pattern options. Designs are further enhanced when contrasting colors are used. A distinctive paving product, the Bishop's Hat adds a distinguishing complement to any project.

UNITS



#271 - Bishop's Hat 60mm



#213 - CityStone 4x4 60mm

Before specifying a specific product, please confirm availability with your local Keystone Hardscapes producer.

UNIT DIMENSIONS

PRODUCT	DIMENSIONS			PRODUCT #
	Width	Length	Height	
Bishop's Hat 60mm	7.38" 187.4mm	11.13" 282.8mm	2.36" 60mm	271

PRODUCT	DIMENSIONS			PRODUCT #
	Width	Length	Height	
CityStone 4x4 60mm	3.94" 100mm	3.94" 100mm	2.36" 60mm	213

FEATURES & BENEFITS

Perfect For:

- Light vehicular applications.
- Made of durable concrete with iron oxide pigments that will not fade with extended UV exposure. Meets or exceeds applicable requirements of ASTM C936.

Ease of Installation

- Joints and surfaces meet ADA gap and lippage requirements.
- Designed to miter and create a variety of geometric patterns with CityStone and Holland pavers.

Aesthetics

- Smooth surfaces and classical chamfers define each stone to create texture and visual structure with timeless appeal.

Note: Unit color, dimensions, weight, and availability varies by manufacturer.



PATIOS



DRIVEWAYS



POOL DECKS



LIGHT
VEHICULAR



INSTALLATION INSTRUCTIONS

STEP 1: Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material - typically minimum 4-8 inches thick (101.6mm - 203.2mm). Compact base to optimum moisture/density or as otherwise directed by Site Engineer/ Architect/Landscape Architect.

STEP 2: Place bedding course of washed sand conforming to the grading requirements of ASTM C 33 to a maximum uniform depth of 1-1½ inch (25-38mm). Screed to the grade and profile required.

STEP 3: Install Bishop's Hat pavers with joints to a nominal 1/8 inch (3mm).

STEP 4: Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.


STEP 5: Use a low-amplitude plate compactor capable of at least minimum of 4,000 lbf (18 kN) at a frequency of 75-100 Hz to vibrate the pavers into the sand. Remove any cracked or damaged pavers and replace with new units.

STEP 6: Post compaction, spread and sweep dry ASTM C 33 or ASTM C 144 sand over the entire paving area.


STEP 7: Make one more pass with the plate compactor to completely fill the joints with sand.

STEP 8: Sweep paver surface clean for final acceptance by owner/ owner's agent.

NOTE: Colors are shown as accurately as possible in brochures and samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

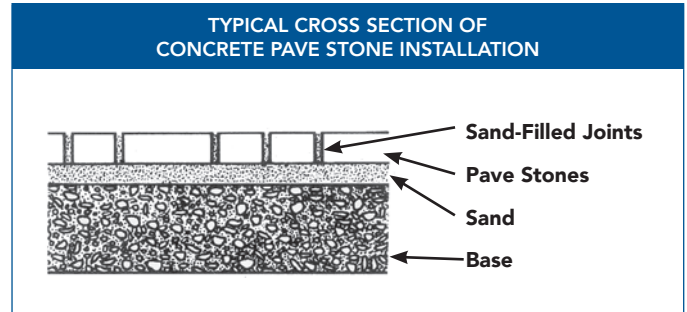

INSTALLATION PATTERNS

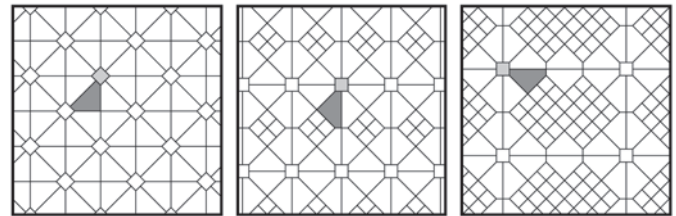

Bishop's Hat 01

Bishop's Hat 02

Bishop's Hat 03

Complete installation and specification details are available by contacting your Keystone Hardscapes Sales Representative.



www.keystonehardscapes.com

FOLLOW US

